

Midea



All Easy Pro

Stay Cool, Stay Efficiency



super ionizer



golden fin



easy installation



follow me



easy to clean



3D air flow

Peace of Mind

OUR STORY SO FAR

Carved from 50 years of experience

Midea, established in 1968, is a publicly listed company and since July 2016, a **Fortune 500 company** offering one of the most comprehensive ranges in the home appliances industry. Midea specialises in air treatment (residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care and lighting.

More than
\$261Bn*
of revenue in
2021
*in RMB

Serve
customers in
200+
countries

34
global
production
facilities

136,800
employees
worldwide

Global Fortune
500
company



www.midea.com/global

www.midea.com.sg

KEY FEATURES

ENVIRONMENT FRIENDLY (R32 REFRIGERANT)

Reducing Singapore's greenhouse gases emissions from from the use of hydrofluorocarbons. Midea use refrigerants with a lower global warming potential



MORE ENERGY EFFICIENT,
LESS POLLUTION



RECOGNIZED 5 TICKS

The highest energy efficiency rating recognized from NEA. Midea All Easy Pro Series provides with the most comfortable & superior cooling environment.



PRIME GUARD GOLDEN FIN

Get more resistance from water, rust, adherent grease, oxidation and other corrosive elements with a steadier cooling performance with our signature Golden Fin protection.

The Golden Fin coated cover protects the fan motor and prevents water from seeping into the indoor unit, preventing mould and rust. Our signature Golden Fin repels water, making it more durable and less likely to breakdown.




SMART WIFI-CONTROL

Keep your air conditioner in control with MSmarthome App anytime & anywhere.



3D AIR FLOW

The deflectors swing automatically in all directions to intentionally direct airflow to every corner of the room.

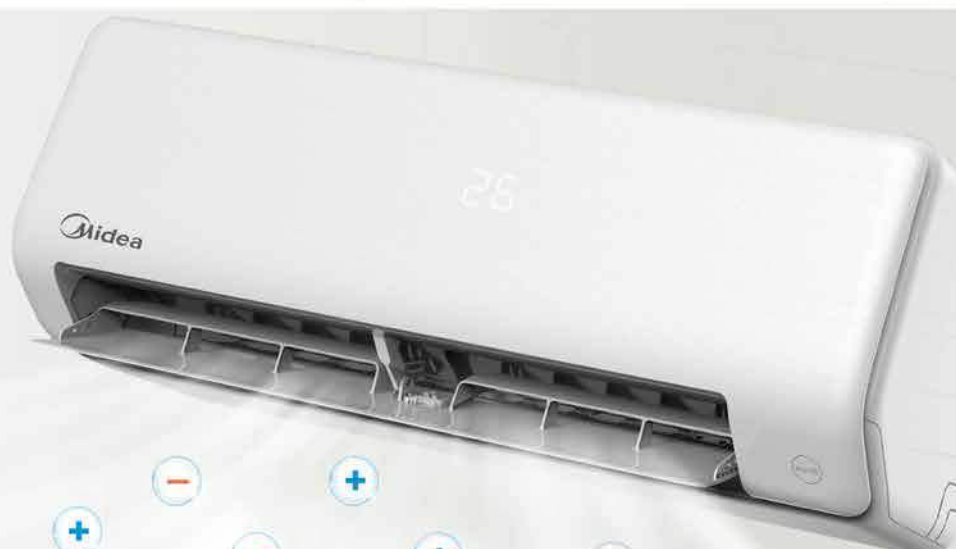

SUPER IONIZER

Our units produce negative & positive ions to neutralise dust and bacteria, keeping you safe from unwelcome allergies & pollutions..

SMART WIFI-CONTROL



smart sleep curve



turbo mode



auto swing



24-hours timer

SMART SLEEP SCHEDULE

- *This function is designed to improve your sleep quality with greater comfort
- *Up to 8 hours

SWING SETTING

- *Control the air flow direction (horizontal & vertical) and distribute evenly to the corners of the room. Expanding the comfort area.

MODE SETTING

- * Variety of mode available to choose. Different type of mode comes with different functions. Choose the most suitable one now with your smart phone.

TIMER SETTING

- * A glance on your mobile screen make things easier. You can set your aircon at your desired mode, temperature & fan speed for optimum comfort



MSmartHome
Download via



EXPLORE IT ON
AppGallery



Download on the
App Store



GET IT ON
Google Play



How to Activate MSmart Home?

Visit <https://www.midea.com/sg>
on how to activate MSmart Home.



COMFORT

Your comfort comes first

Apart from the innovative technology that drives Midea air conditioners to be the best, we strive to always produce a product that has the comfort of its users as a top priority. Key comfort features in our air conditioners maintain temperatures, keep you cool on the move and is quietly calming for the ideal environment in your home or office.




follow me

Keep your remote close to you and let the "Follow Me" mode measure the air temperature around you. This Allows for cool air to be delivered directly to your position in an effortless way.

Keeping with the theme of ultimate comfort, sleep mode adjusts the room temperature after you've fallen asleep to make sure you're not too cold. By doing this, it also saves energy



sleep mode

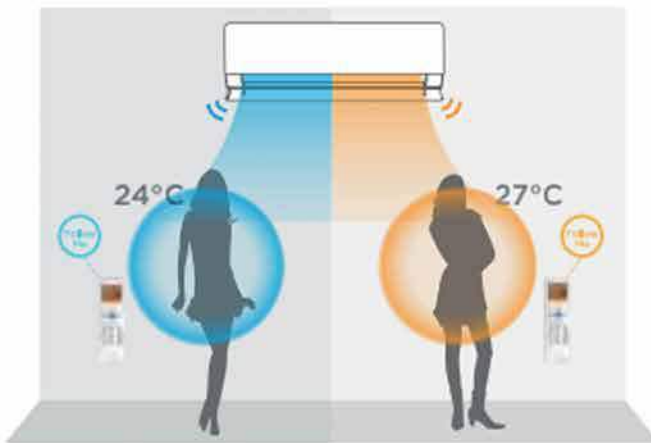


silent

Operating as quiet as 21dB allows you to rest peacefully and maintains a calm ambience in your spaces. The only sound that's heard is the cool air circulating the room.

The LED display illuminates at the unit so you'll always know what temperature is set.




LED

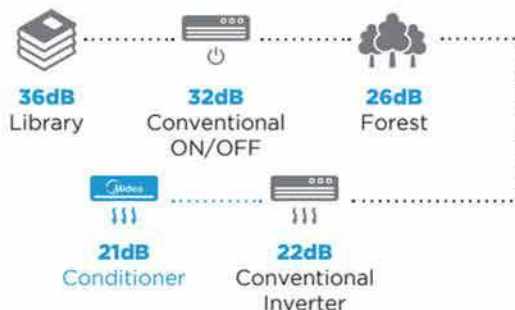

golden fin


Get more resistance from water, rust, adherent grease, oxidation and other corrosive elements with a steadier cooling performance with our signature Golden Fin protection.
-The Golden Fin coated cover protects the motor and prevents water from seeping into the indoor unit, preventing mould and rust.

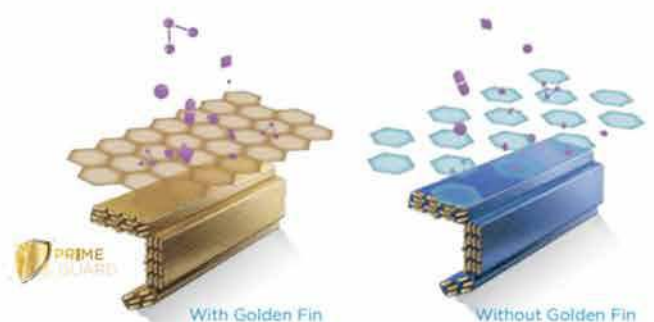

ALL EASY PRO

Minimal Structure, Minimize Your Bill

Thanks to the front E-box and PCB design that releases more space for a larger air volume in and out, the All Easy Pro delivers you the stronger cooling performance with lower energy consumption that save your bills.

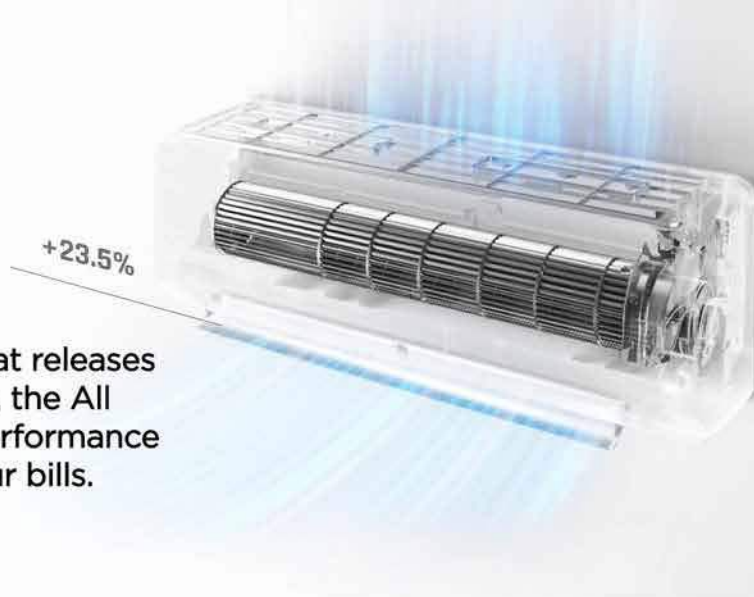

Easy Installation

Compact outdoor units that allows easy installation through HDB window or limited space.



Easy Cleaning with



Screw installation


With the innovative 1-screw design, it only takes 1 minute to disassemble the inside fan to clean. Save your time, save your technician bills.

No need to bother opening up the front panel anymore. Clean your filter as often as you want.



PRODUCT MODELS

All Easy Pro Premium - Multi Split (Up to 4)



wi-fi control super ionizer 3D air flow golden fin LED follow me fast cooling sleep mode silent

Indoor Unit

5 Ticks			Model		
All Easy Pro Premium			MSEID-09	MSEID-12	MSEID-18
Power supply		V / Ph / Hz	220-240 / 1/ 50		
Cooling	Capacity	Btu / H	9000	12000	18000
	Rated input	W	560	850	1318
Indoor unit	Wi-Fi port		Dongle	Dongle	Dongle
	Indoor air flow (H / M / L)	CMH	560 / 450 / 350	610 / 520 / 400	800 / 600 / 500
	Indoor noise level (H / M / L)	dB(A)	35.5 / 29.5 / 26.5	37.5 / 32.5 / 29	40.5 / 34.5 / 30.5
	Dimension (W x D x H)	mm	795 x 225 x 295	795 x 225 x 295	965 x 239 x 319
	Packing (W x D x H)	mm	870 x 370 x 305	870 x 370 x 305	1045 x 400 x 325
	Net / Gross weight	Kg	10.3 / 13.1	10.3 / 13.1	12.3 / 16.2
	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"	1/4", 1/2"
Indoor operating temperature range		°C	16 - 30		

Outdoor Unit


5 Ticks			Model	
All Easy Pro Premium			MAE-3M25E	MAE-4M30E
Power Supply		V / Ph / Hz	220-240 / 1/ 50	
Cooling	Capacity	kW	5.7	7.5
	Rated input	W	1170	1540
	Rated current	A	5.9	6.8
	Weighted COP / Nea label	Ticks	5.54 / √√√√√	5.74 / √√√√√
Outdoor noise level		dB(A)	56	56
Outdoor unit	Dimension (Wx DX H)	mm	890 x 342 x 673	890 x 342 x 673
	Packing (Wx Dx H)	mm	1030 x 438 x 750	1030 x 438 x 750
	Net/ Gross weight	Kg	40.5 / 44.3	45.2 / 48.5
Refrigerant type/ Charge		g	R32 / 1400	R32 / 1700
Connectable indoor united quantity (Max)		Qty	3	4
Refrigerant piping	Liquid side/ Gas side	Inch	1/4", 3/8" (3x)	1/4", 3/8" (4x)
	Max. length for all rooms	m	60	80
	Max. length for one indoor unit	m	30	35
	Max. height difference between indoor and outdoor unit	m	15	15
Operating ambient temperature		°C	0-50	

Note:

1. Cooling capacity is based on 27°C DB / 19°C WB (indoor) and 35°C DB (outdoor).
2. Picture shown are for illustration purpose only. Actual products may vary.
3. Specification may changed without notification due to product innovation.

PRODUCT MODELS

All Easy Pro Standard - Multi Split (Up to 4)



golden fin



LED



follow me



fast cooling



sleep mode



silent

Indoor Unit

4 Ticks			Model		
All Easy Pro			MSEID-09(S)	MSEID-12(S)	MSEID-18(S)
Power supply		V / Ph / Hz	220-240 / 1 / 50		
Cooling	Capacity	Btu/ H	9000	12000	18000
	Rated input	W	560	850	1250
Indoor unit	Wi-Fi port		-	-	-
	Indoor air flow (H / M / L)	CMH	560 / 450 / 350	610 / 520 / 400	800 / 600 / 500
	Indoor noise level (H / M / L)	dB(A)	35.5 / 29.5 / 26.5	37.5 / 32.5 / 29	40.5 / 34.5 / 30.5
	Dimension (W x D x H)	mm	795 x 225 x 295	795 x 225 x 295	965 x 239 x 319
	Packing (W x D x H)	mm	870 x 370 x 305	870 x 370 x 305	1045 x 400 x 325
	Net / Gross weight	Kg	10.3 / 13.1	10.3 / 13.1	12.3 / 16.2
	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"	1/4", 1/2"
Indoor operating temperature range		°C	16 - 30		

Outdoor Unit

4 Ticks			Model	
All Easy Pro			MAE-3M21D	MAE-4M28D
Power Supply		V / Ph / Hz	220-240 / 1 / 50	
Cooling	Capacity	kW	6.1	7.8
	Rated input	W	1420	1810
	Rated current	A	6.2	8.1
	Weighted COP / Nea label	Ticks	5.27 / ✓✓✓✓	5.16 / ✓✓✓✓
Outdoor noise level		dB(A)	55	56
Outdoor unit	Dimension (W x D x H)	mm	890 x 342 x 673	890 x 342 x 673
	Packing (W x D x H)	mm	1030 x 438 x 750	1030 x 438 x 750
	Net / Gross weight	Kg	40 / 43.6	43.7 / 47.2
Refrigerant type/ Charge		g	R32 / 1300	R32 / 1500
Connectable indoor unit quantity (Max)		Qty	3	4
Refrigerant piping	Liquid side / Gas side	Inch	1/4", 3/8" (3x)	1/4", 3/8" (4x)
	Max. length for all rooms	m	60	80
	Max. length for one indoor unit	m	30	35
	Max. height difference between indoor and outdoor unit	m	15	15
Operating ambient temperature		°C	0 - 50	

Note:


1. Cooling capacity is based on 27°C DB / 19°C WB (indoor) and 35°C DB (outdoor).

2. Picture shown are for illustration purpose only. Actual may vary.

3. Specification may changed without notification due to product innovation.

SINGLE SPLIT SERIES

All Easy Pro Standard - Single Split

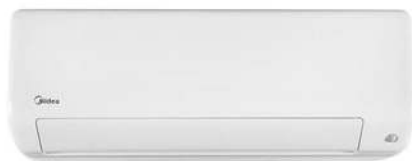

golden fin



LED



follow me



fast cooling



Indoor Unit

			Model			
All Easy Pro			MSEID-09(S)	MSEID-12(S)	MSEID-18(S)	MSEID-24(S)
NEA Ticks			✓✓✓✓	✓✓✓	✓✓✓	✓✓✓
Cooling	Capacity	Btu / H	9000	12000	18000	24000
	Rated input	W	560	850	1250	2350
	Rated current	A	2.74	3.79	5.7	8.23
Indoor unit	Indoor air flow (H / M / L)	CMH	560 / 450 / 350	610 / 520 / 400	800 / 600 / 500	1100 / 780 / 600
	Indoor noise level (H / M / L)	dB(A)	35.5 / 29.5 / 26.5	37.5 / 32.5 / 29	40.5 / 34.5 / 30.5	44.5 / 40 / 33
	Dimension (W x D x H)	mm	795 x 225 x 295	795 x 225 x 295	965 x 239 x 319	1140 x 297 x 370
	Packing (W x D x H)	mm	870 x 370 x 305	870 x 370 x 305	1045 x 400 x 325	1230 x 455 x 355
	Net / Gross weight	Kg	10.3 / 13.1	10.3 / 13.1	12.3 / 16.2	19.7 / 24.8
	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"	1/4", 1/2"	3/8", 5/8"
Indoor operating temperature range		°C	17 - 30			

Outdoor Unit

			Model			
All Easy Pro			MSEOD-09	MSEOD-12	MSEOD-18	MSEOD-24
Wighted COP / NEA Ticks			5.31 / ✓✓✓✓	5.11 / ✓✓✓	4.66 / ✓✓✓	4.58 / ✓✓✓
Outdoor unit	Dimension (W x D x H)	mm	765 x 303 x 555	765 x 303 x 555	890 x 342 x 673	890 x 342 x 673
	Net / Gross weight	Kg	22.7 / 25.2	24.3 / 26.6	38.4 / 41.4	43.3 / 46.3
Refrigerant piping	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"	1/4", 1/2"	3/8", 5/8"
	Max. refrigerant pipe length	m	25	25	30	50
	Max. difference in level	m	10	10	20	25
Operating ambient temperature		m	0 - 50			

Note:

1. Cooling capacity is based on 27°C DB / 19°C WB (indoor) and 35°C DB (outdoor).
2. Picture shown are for illustration purpose only. Actual products may vary.
3. Specification may changed without notification due to product innovation.

COMBINATION SYSTEMS TABLE

All Easy Pro Premium

Outdoor model		MAE-3M21D									
Operation	Indoor	Cooling Capacity (KW)				Running Current (Amp)			Input (KW)		
		A Room	B Room	C Room	Total	Min.	Rated	Max.	Min.	Rated	Max.
1 Room	9	2.6			2.6	2.95	4.61	5.54	0.68	1.06	1.27
	12	3.2			3.2	3.04	5.57	6.68	0.7	1.28	1.54
	18	5.3			5.3	3.41	8.53	10.24	0.79	7.96	2.36
2 Rooms	9+9	2.6	2.6		5.2	3.12	7.07	8.48	0.72	1.63	1.95
	9+12	2.69	3.31		6	3.21	7.79	9.34	0.74	1.79	2.15
	9+18	2.29	4.66		6.95	3.36	8.39	10.07	0.77	1.93	2.32
	12+12	3.19	3.19		6.38	3.22	8.04	9.65	0.74	1.85	2.22
	12+18	2.8	4.18		6.98	3.52	8.8	10.56	0.81	2.02	2.43
3 Rooms	9+9+9	2.4	2.4	2.4	7.2	3.48	8.7	10.26	0.8	2	2.36
	9+9+9	2.19	2.19	2.83	7.21	3.48	8.71	10.28	0.8	2	2.36
	9+9+18	1.82	1.82	3.59	7.23	3.49	8.73	10.3	0.8	2.01	2.37
	9+12+12	1.95	2.65	2.65	7.25	3.5	8.76	10.33	0.81	2.01	2.38
	12+12+12	2.42	2.42	2.42	7.26	3.51	8.77	10.35	0.81	2.02	2.38


		MAE-4M30E										
		Cooling Capacity (KW)					Running Current (Amp)			Input (KW)		
Operation	Indoor	A Room	B Room	C Room	D Room	Total	Min.	Rated	Max.	Min.	Rated	Max.
1 Room	9	2.7				2.7	3.06	3.35	4.02	0.7	0.77	0.93
	12	3.46				3.46	3.29	4.3	5.16	0.76	0.99	1.19
	18	5.35				5.35	3.51	6.65	7.98	0.81	1.53	1.83
2 Rooms	9+9	2.6	2.6			5.2	3.74	3.28	8.04	0.86	1.44	1.85
	9+12	2.6	3.45			6.05	3.87	7.11	9.11	0.89	1.64	2.09
	9+18	2.5	5.1			7.6	3.48	8.7	11.13	0.8	2	5.56
	12+12	3.4	3.4			6.8	3.2	7.99	10.23	0.74	1.84	5.35
	12+18	3.1	4.8			7.9	3.52	8.81	11.27	0.81	2.03	5.59
	18+18	4.4	4.4			8.8	3.92	9.81	11.58	0.9	2.26	2.66
	9+9+9	2.4	2.4	2.4		7.2	3.21	8.03	9.87	0.74	1.85	2.27
3 Rooms	9+9+12	2.4	2.4	3.1		7.9	3.43	8.59	10.3	0.79	1.98	2.37
	9+9+18	2.23	2.23	4.3		8.77	3.72	9.3	10.97	0.86	2.14	2.52
	9+12+12	2.5	3.08	3.08		8.65	3.67	9.17	11.19	0.84	2.11	2.57
	9+12+18	2.13	2.62	4.34		9.09	3.76	9.41	11.01	0.87	2.16	2.53
	9+18+18	1.82	3.64	3.64		3.1	3.74	9.35	10.94	0.86	2.15	2.52
	12+12+12	2.95	2.95	2.95		8.85	3.71	9.27	10.94	0.85	2.13	2.52
	12+12+18	2.58	2.58	3.86		9.02	3.73	9.34	10.92	0.86	2.15	2.51
4 Rooms	9+9+9+9	2.26	2.26	2.26	2.26	9.02	3.65	9.12	10.67	0.84	2.1	2.45
	9+9+9+12	2.15	2.15	2.15	2.64	9.09	3.68	9.19	10.75	0.85	2.11	2.47
	9+9+9+18	1.82	1.82	1.82	3.64	9.1	3.68	9.2	10.77	0.85	2.12	2.48
	9+9+12+12	1.95	1.95	2.6	2.6	9.1	3.68	9.2	10.77	0.85	2.12	2.48
	9+12+12+12	1.87	2.41	2.41	2.41	9.1	3.68	9.2	10.77	0.85	2.12	2.48

All Easy Pro

Outdoor model		MAE-3M25E									
Operation	Indoor	Cooling Capacity (KW)				Running Current (Amp)			Input (KW)		
		A Room	B Room	C Room	Total	Min.	Rated	Max.	Min.	Rated	Max.
1 Room	9	2.6			2.6	2.95	4.61	5.54	0.68	1.06	1.27
	12	3.2			3.2	3.04	5.57	6.68	0.7	1.28	1.54
	18	5.3			5.3	3.41	8.53	10.24	0.79	7.96	2.36
2 Rooms	9+9	2.6	2.6		5.2	3.12	7.07	8.48	0.72	1.63	1.95
	9+12	2.69	3.31		6	3.21	7.79	9.34	0.74	1.79	2.15
	9+18	2.29	4.66		6.95	3.36	8.39	10.07	0.77	1.93	2.32
	12+12	3.19	3.19		6.38	3.22	8.04	9.65	0.74	1.85	2.22
	12+18	2.8	4.18		6.98	3.52	8.8	10.56	0.81	2.02	2.43
3 Rooms	9+9+9	2.4	2.4	2.4	7.2	3.48	8.7	10.26	0.8	2	2.36
	9+9+9	2.19	2.19	2.83	7.21	3.48	8.71	10.28	0.8	2	2.36
	9+9+18	1.82	1.82	3.59	7.23	3.49	8.73	10.3	0.8	2.01	2.37
	9+12+12	1.95	2.65	2.65	7.25	3.5	8.76	10.33	0.81	2.01	2.38
	12+12+12	2.42	2.42	2.42	7.26	3.51	8.77	10.35	0.81	2.02	2.38

		MAE-4M28D										
		Cooling Capacity (KW)					Running Current (Amp)			Input (KW)		
Operation	Indoor	A Room	B Room	C Room	D Room	Total	Min.	Rated	Max.	Min.	Rated	Max.
1 Room	9	2.7				2.7	3.06	3.35	4.02	0.7	0.77	0.93
	12	3.46				3.46	3.29	4.3	5.16	0.76	0.99	1.19
	18	5.35				5.35	3.51	6.65	7.98	0.81	1.53	1.83
2 Rooms	9+9	2.6	2.6			5.2	3.74	3.28	8.04	0.86	1.44	1.85
	9+12	2.6	3.45			6.05	3.87	7.11	9.11	0.89	1.64	2.09
	9+18	2.5	5.1			7.6	3.48	8.7	11.13	0.8	2	5.56
	12+12	3.4	3.4			6.8	3.2	7.99	10.23	0.74	1.84	5.35
	12+18	3.1	4.8			7.9	3.52	8.81	11.27	0.81	2.03	5.59
	18+18	4.4	4.4			8.8	3.92	9.81	11.58	0.9	2.26	2.66
	9+9+9	2.4	2.4	2.4		7.2	3.21	8.03	9.87	0.74	1.85	2.27
3 Rooms	9+9+12	2.4	2.4	3.1		7.9	3.43	8.59	10.3	0.79	1.98	2.37
	9+9+18	2.23	2.23	4.3		8.77	3.72	9.3	10.97	0.86	2.14	2.52
	9+12+12	2.5	3.08	3.08		8.65	3.67	9.17	11.19	0.84	2.11	2.57
	9+12+18	2.13	2.62	4.34		9.09	3.76	9.41	11.01	0.87	2.16	2.53
	9+18+18	1.82	3.64	3.64		3.1	3.74	9.35	10.94	0.86	2.15	2.52
	12+12+12	2.95	2.95	2.95		8.85	3.71	9.27	10.94	0.85	2.13	2.52
	12+12+18	2.58	2.58	3.86		9.02	3.73	9.34	10.92	0.86	2.15	2.51
4 Rooms	9+9+9+9	2.26	2.26	2.26	2.26	9.02	3.65	9.12	10.67	0.84	2.1	2.45
	9+9+9+12	2.15	2.15	2.15	2.64	9.09	3.68	9.19	10.75	0.85	2.11	2.47
	9+9+9+18	1.82	1.82	1.82	3.64	9.1	3.68	9.2	10.77	0.85	2.12	2.48
	9+9+12+12	1.95	1.95	2.6	2.6	9.1	3.68	9.2	10.77	0.85	2.12	2.48
	9+12+12+12	1.87	2.41	2.41	2.41	9.1	3.68	9.2	10.77	0.85	2.12	2.48

Outdoor Dimension

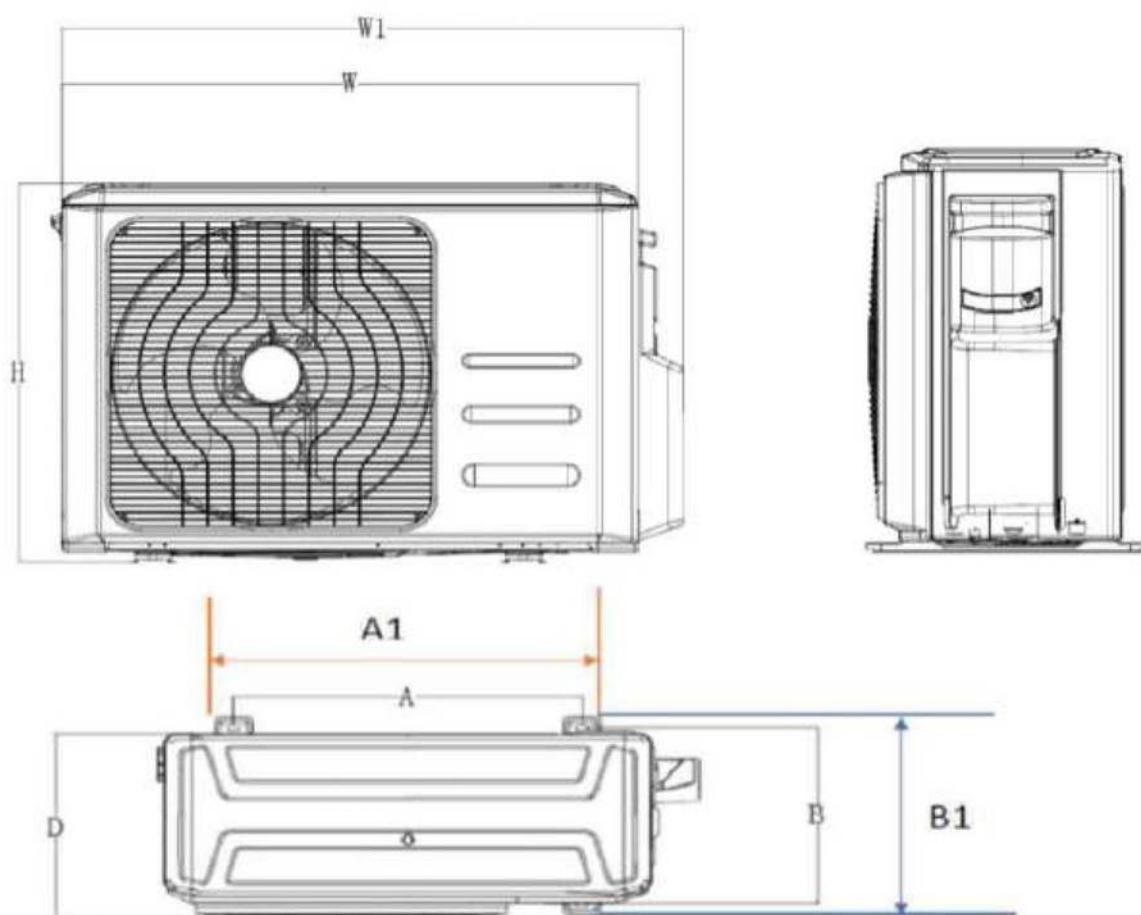

Model	Ticks	W	H	D	W1	A	A1	B	B1	Net W (Kg)
Single Split										
MSEOD-09	4	765	555	303	835	452	514	286	314	22.7
MSEOD-12	3	765	555	303	835	452	514	286	314	24.3
MSEOD-18	3	890	673	342	955	663	737	354	394	38.4
MSEOD-24	3	890	673	342	955	663	737	354	394	43.3
Multi Split (AE Pro)										
MAE-3M21D	4	890	673	342	990	663	737	348	380	40.0
MAE-4M28D	4	890	673	342	990	663	737	348	380	43.7
MAE-3M25E	5	890	673	342	990	663	737	348	380	40.5
MAE-4M30E	5	890	673	342	990	663	737	348	380	45.2
BreezeleSS+										
MAS-1S09E	5	805	554	330	874	511	569	317	346	22.7
MAS-1S12D	4	805	554	330	874	511	569	317	346	24.3



BreezeleSS+

The all-new BreezeleSS+ cooling

- **SOFT:** World's 1st TwinFlap with 7928 Mini-hole Matrix
- **SPEED:** Cool Boost upon power-on within 6 seconds
- **SURROUND:** 360° even cooling from both 5-winged side air-outlets

Key Features



BreezeleSS+

The all-new cooling experience & technology

SURROUND

3-way airflow
Providing 360° even, immersive cooling



SOFT

7928 Mini-hole matrix
Leaving purely the cool without
any breeze

SENSE

Flexible twin-flap design
Choosing from 3 mode sensitive care



For those who demand
the real comfort



SILENCE

21dB quiet operation.
Better life, Sweeter dream.



SAVING

Select the iEcp mode for ultra-low energy consumption for a full night



SMART

MideaAir app can help remotely control your breezeleSS+ air conditioner



SENSE

It adapt to your needs in the most sensitive way possible

SILENCE

SAVING

SMART

SENSE

All-New air duct design

All-New energy saving algorithm control

All-New app-based smart functions

All-New deflector manipulation design

PRODUCT MODELS

BreezeleSS+ Series (Single Split)



Indoor Unit

Breezeless Series			Model	
Ticks			MSAS-09E	MSAS-12D
Power supply			✓✓✓✓✓	✓✓✓✓✓
V / Ph / Hz			220-230 / 1 / 50	
Cooling	Capacity	Btu / H	10000 (2900-11200)	12300 (4500-13700)
	Rated input	W	697	895
Indoor unit	Indoor air flow (H / M / L)	CMH	640 / 520 / 400	640 / 520 / 400
	Indoor noise level (H / M / L)	dB(A)	40 / 35.5 / 28.5	40 / 35.5 / 28.5
	Dimension (W x D x H)	mm	940 x 193 x 325	940 x 193 x 325
	Packing (W x D x H)	mm	1055 x 385 x 290	1055 x 385 x 290
	Net / Gross weight	Kg	10.7 / 13.8	10.7 / 13.8
	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"
Indoor operating temperature range		°C	17 - 30	

* Breezeless mode will stop operating if meet below conditions:

1. Indoor temperature cannot lower than 24°.
2. Indoor humidity level cannot higher than 70%.

Outdoor Unit

Breezeless Series			Model	
Power Supply			MAS-1S09E	MAS-1S12D
V / Ph / Hz			220-240 / 1 / 50	
Weighted COP / Nea label		Ticks	6.07 / ✓✓✓✓✓	5.5 / ✓✓✓✓✓
Outdoor noise level		dB(A)	55	55
Outdoor unit	Dimension (W x D x H)	mm	805 x 330 x 554	805 x 330 x 554
	Packing (W x D x H)	mm	915 x 370 x 615	915 x 370 x 615
	Net / Gross weight	Kg	29.9 / 32.5	29.9 / 32.5
Refrigerant type / Charge		g	R32	R32
Refrigerant piping	Liquid side / Gas side	Inch	1/4", 3/8"	1/4", 3/8"
	Max. refrigerant pipe length	m	25	25
	Max difference in level	m	10	10
Outdoor (Cooling / heating)		°C	0-50	

Note:

1. Cooling capacity is based on 27°C DB / 19°C WB (indoor) and 35°C DB (outdoor).
2. Picture shown are for illustration purpose only. Actual may vary.
3. Specification may changed without notification due to product innovation.



MD (SINGAPORE) CONSUMER PRODUCT CO. PTE LTD

No. 158 Cecil Street #07-01/02 Singapore 069545

Visit us at **www.midea.com.sg** for more product and promotional information

Customer Service Hotline: +65 6222 2536
Email: gmcs@midea.com



Connect with **midea.sg**

