




Window Type Air Conditioner




Easy installation,
Ultimate convenience.



Self-evaporating System

Midea's self-evaporating system recycles water condensation back into the air, resulting in increased energy efficiency, cooling performance and reduces the need to empty the water tank.

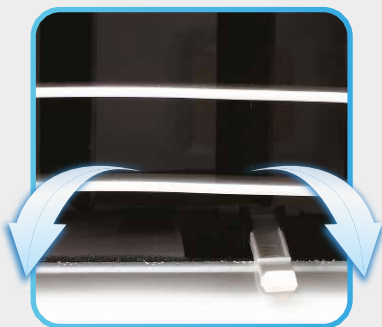

Fresh Air Ventilation

The vent control is located above the control knobs. For maximum cooling efficiency, CLOSE the vent. This will allow internal air circulation. OPEN the vent to discharge stale air.



Remote Control

Control from anywhere in the room.

Specifications



Model No			MWAC-09	MWAC-12	MWAC-18
Power supply		V/Ph/Hz	220-240/1/50		
Cooling	Cooling Capacity	Btu/h	9000	12000	18000
	Input	W	879	1172	1760
	Current	A	4.0	5.2	8
	EER (Tested)	W/W	3.01	3.08	3.01
Moisture Removal		L/h	1.0	1.2	1.8
Max current		A	5.8	9.0	13
Starting current		A	20	25	42
Indoor side air flow (Hi/Mi/Lo)		m3/h	347/315/273	428/377/334	623/550/496
Indoor side noise level (Hi/Mi/Lo)		dB(A)	51/49/47	51/49/46	50/49/48
Outdoor side noise level (Hi/Mi/Lo)		dB(A)	56	60	60
Refrigerant type		kg	R410A/0.43	R410A/0.55	R410A/0.80
Wiring/Plug type			1.0x3/BS	1.5x3/BS	2.5x3/no plug
Control type			Remote control		
Operation temp	Indoor	°C	17 to 32		
	Outdoor	°C	18 to 43		
Application area		m2	12 to 18	16 to 23	24 to 35
Dimension(W*H*D)		mm	450x346x585	560x380x600	660x428x680
Packing (W*H*D)		mm	505x435x640	620x430x685	746x515x815
Net/Gross weight		Kg	32.1/34.7	37.2/39.9	58.3/62.8
Loading quantity 20' /40' /40'HQ		Pieces	200/410/492	135/285/342	84/180/225



SWING



REMOTE CONTROL



WIDE-ANGLE AIR FLOW



TIMER